
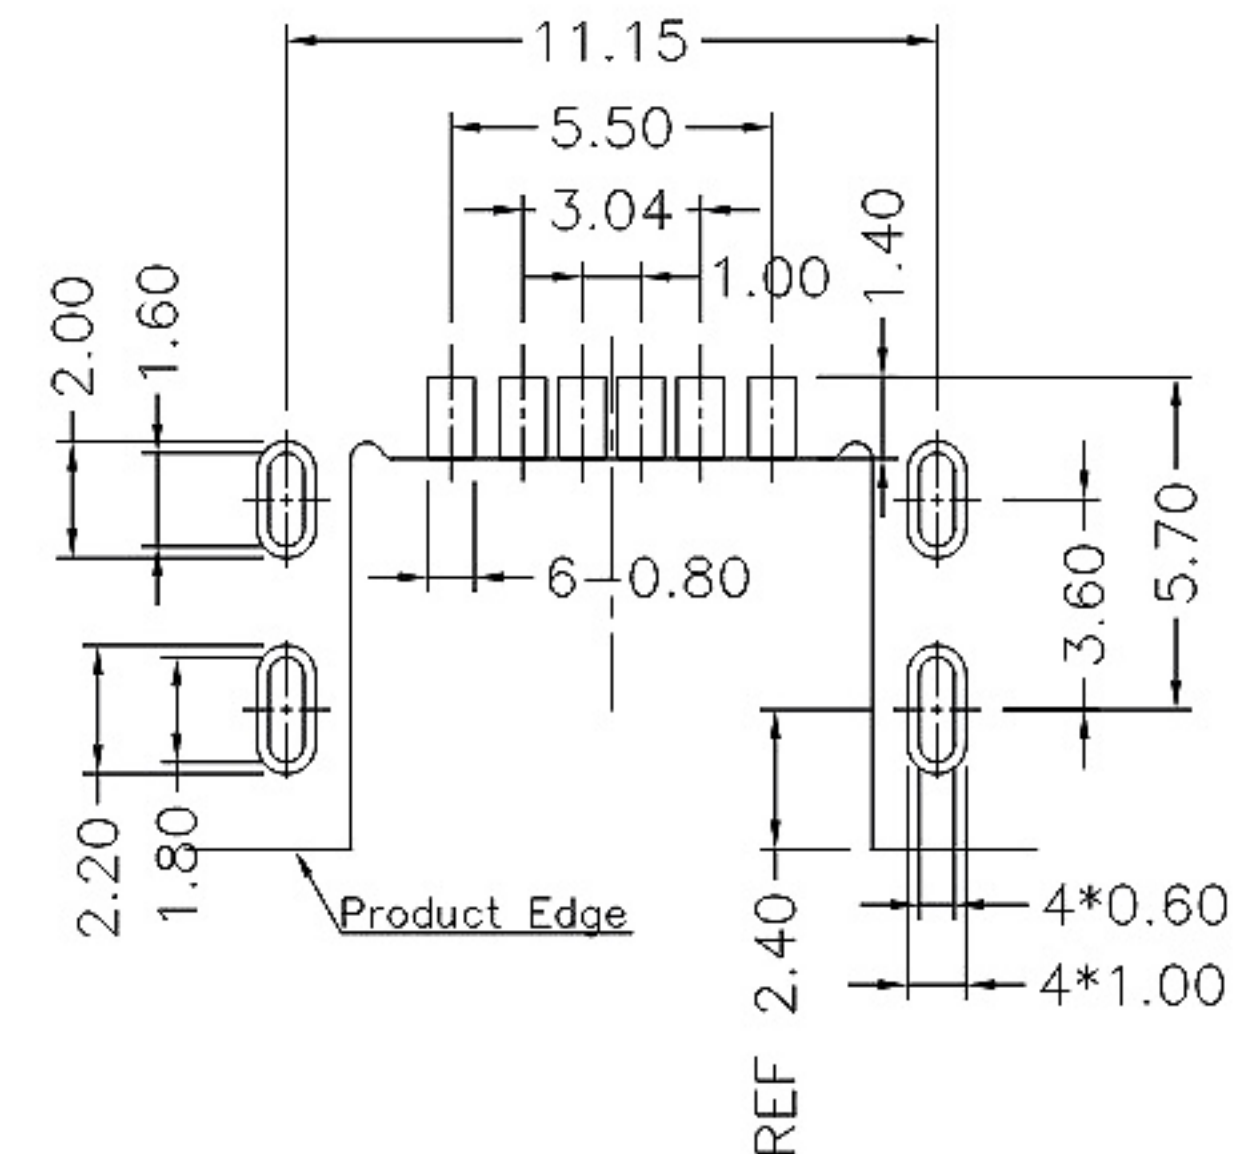
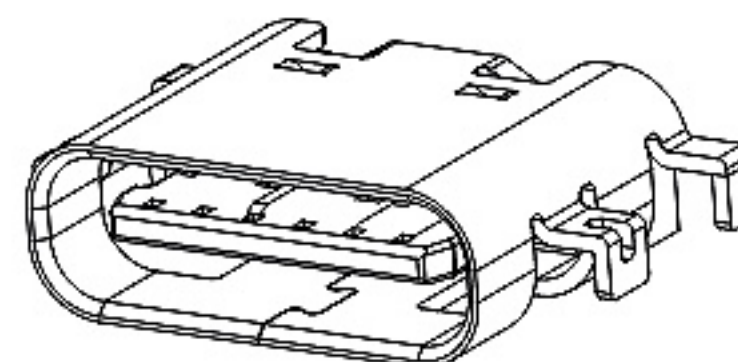
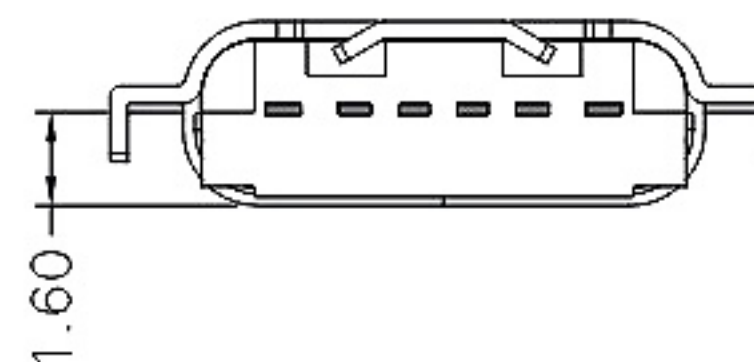
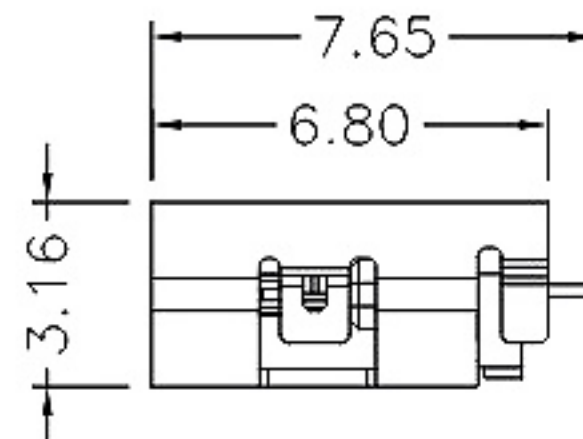
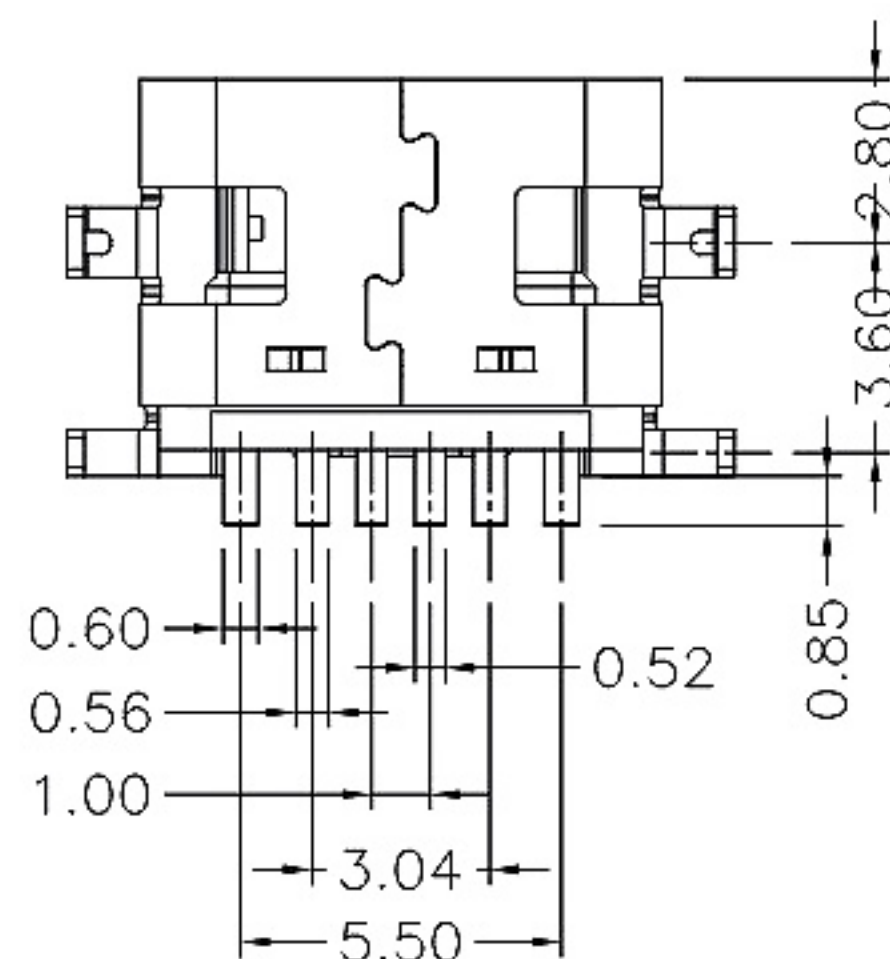
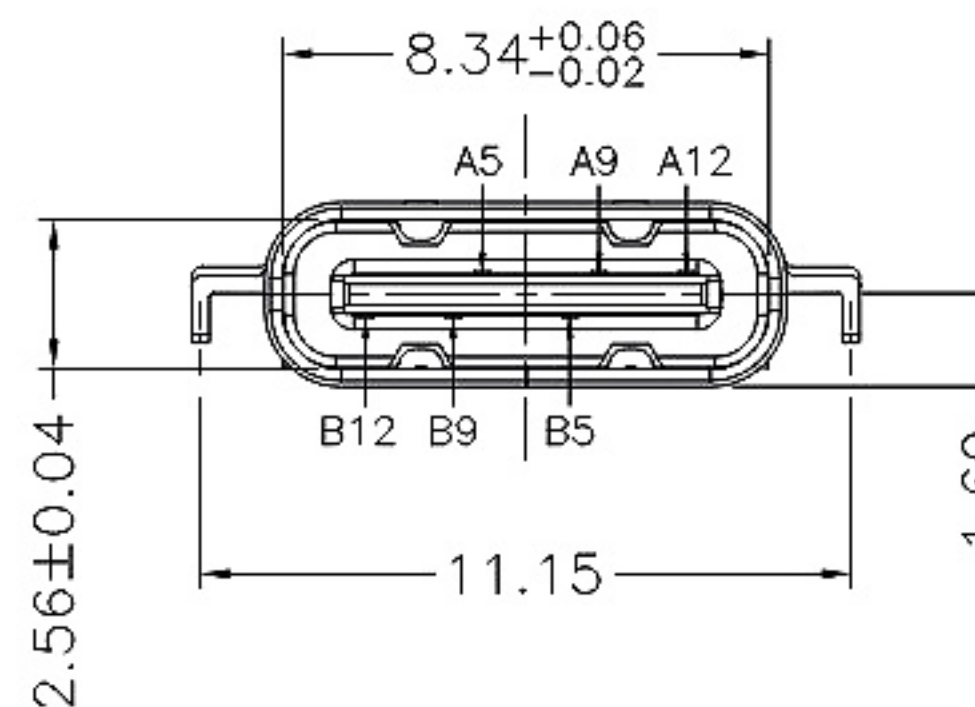


REV.	DESCRIPTION	DATE

NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 5.0V
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 5000 CYCLES

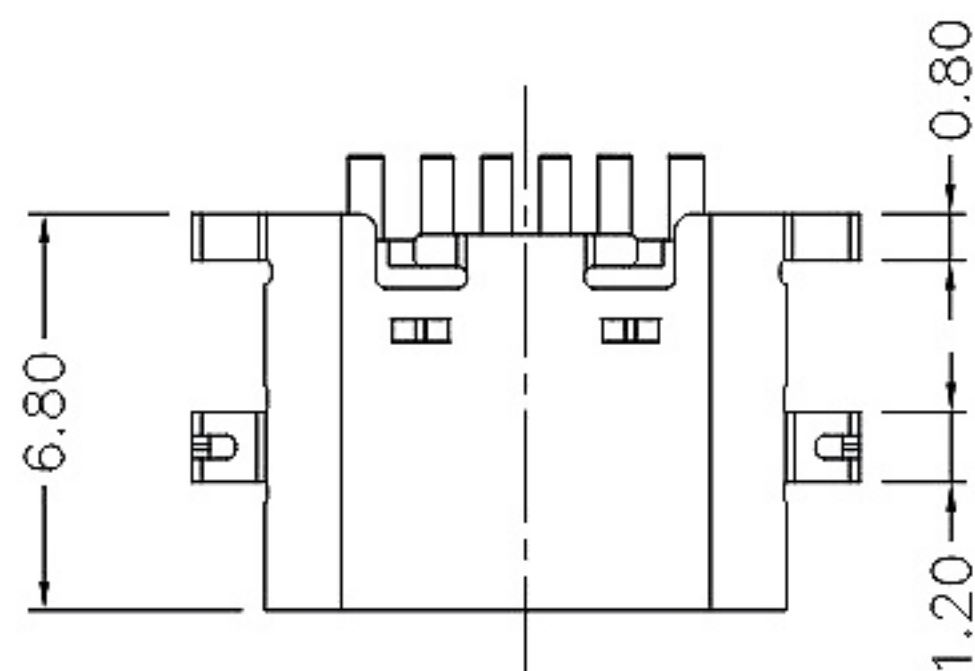

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

3	SHELL	STAINLESS STEEL	NI: 50u" Plated	1SET
2	CONTACT	COPPER ALLOY	Au1u"/NI: 50u" Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

B12	GND	光恒科技有限公司 GUANG HENG TECHNOLOGY CO., LTD		
B9	VBUS			
B5	CC2			
A5	CC1			
A9	VBUS			
A12	GND	TOLERANCE	DRAWER	NAME
		0. ±0.30 0. ±4*	NICOLE	USB3.1 C A/F 6P
		0.0 ±0.20 0.0 ±2*	CHECK	DIP SMD Mid-Mount
		0.00 ±0.15		PART NO.
				CUC011AFP-BP1N
PIN	SIGNAL NAME	SCALE	SIZE	SHEET
		NONE	A4	1 / 1
				REV.
				A
				DRAW NO.